

AFRL-PR-WP-TP-2006-217

**MAGNETIZATION LOSSES IN
MULTIFILAMENT COATED
SUPERCONDUCTORS**



G.A. Levin, P.N. Barnes, N. Amemiya, S. Kasai, K. Yoda, and Z. Jiang

AUGUST 2006

Approved for public release; distribution is unlimited.

STINFO COPY

© 2005 American Institute of Physics

This work was funded in whole or in part by Department of the Air Force contract AOARD-03-4031. The U.S. Government has for itself and others acting on its behalf an unlimited, paid-up, nonexclusive, irrevocable worldwide license to use, modify, reproduce, release, perform, display, or disclose the work by or on behalf of the Government. All other rights are reserved by the copyright owner.

**PROPULSION DIRECTORATE
AIR FORCE MATERIEL COMMAND
AIR FORCE RESEARCH LABORATORY
WRIGHT-PATTERSON AIR FORCE BASE, OH 45433-7251**

REPORT DOCUMENTATION PAGE				Form Approved OMB No. 0704-0188	
<p>The public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Department of Defense, Washington Headquarters Services, Directorate for Information Operations and Reports (0704-0188), 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to any penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number. PLEASE DO NOT RETURN YOUR FORM TO THE ABOVE ADDRESS.</p>					
1. REPORT DATE (DD-MM-YY) August 2006		2. REPORT TYPE Journal Article Postprint		3. DATES COVERED (From - To) 08/26/2003 – 08/26/2004	
4. TITLE AND SUBTITLE MAGNETIZATION LOSSES IN MULTIFILAMENT COATED SUPERCONDUCTORS				5a. CONTRACT NUMBER AOARD-03-4031	
				5b. GRANT NUMBER	
				5c. PROGRAM ELEMENT NUMBER 61102F/62203F	
6. AUTHOR(S) G.A. Levin and P.N. Barnes (AFRL/PRPG) N. Amemiya, S. Kasai, K. Yoda, and Z. Jiang (Yokohama National University)				5d. PROJECT NUMBER 3145	
				5e. TASK NUMBER 32	
				5f. WORK UNIT NUMBER 314532Z9	
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) Power Generation Branch (AFRL/PRPG) Power Division Propulsion Directorate Air Force Research Laboratory, Air Force Materiel Command Wright-Patterson Air Force Base, OH 45433-7251				8. PERFORMING ORGANIZATION REPORT NUMBER Yokohama National University Faculty of Engineering, 79-5 Tokiwadai, Hodogaya Yokohama 240-8501, Japan	
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES) Propulsion Directorate Air Force Research Laboratory Air Force Materiel Command Wright-Patterson AFB, OH 45433-7251				10. SPONSORING/MONITORING AGENCY ACRONYM(S) AFRL-PR-WP	
				11. SPONSORING/MONITORING AGENCY REPORT NUMBER(S) AFRL-PR-WP-TP-2006-217	
12. DISTRIBUTION/AVAILABILITY STATEMENT Approved for public release; distribution is unlimited.					
13. SUPPLEMENTARY NOTES Journal Article postprint published in the Applied Physics Letters, 86, 072509 (2005) published by American Institute of Physics. PAO case number: AFRL/WS 04-0753 (date cleared: 01 Sep 2004). © 2005 American Institute of Physics. This work was funded in whole or in part by Department of the Air Force contract AOARD-03-4031. The U.S. Government has for itself and others acting on its behalf an unlimited, paid-up, nonexclusive, irrevocable worldwide license to use, modify, reproduce, release, perform, display, or disclose the work by or on behalf of the Government. All other rights are reserved by the copyright owner.					
14. ABSTRACT We report the results of a study of the magnetization losses in experimental multifilament, as well as control (uniform) coated superconductors exposed to time-varying magnetic fields of various frequencies. Both the hysteresis loss, proportional to the sweep rate of the applied magnetic field, and the coupling loss, proportional to the square of the sweep rate, have been observed. A scaling is found that allows us to quantify each of these contributions and extrapolate the results of the experiment beyond the envelope of accessible field amplitude and frequency. The combined loss in the multifilament conductor is reduced by about 90% in comparison with the uniform conductor at full field penetration at a sweep rate as high as 3 T/s.					
15. SUBJECT TERMS magnetization losses, superconductor, YBCO coated conductor					
16. SECURITY CLASSIFICATION OF:			17. LIMITATION OF ABSTRACT: SAR	18. NUMBER OF PAGES 10	19a. NAME OF RESPONSIBLE PERSON (Monitor) Paul N. Barnes 19b. TELEPHONE NUMBER (Include Area Code) N/A
a. REPORT Unclassified	b. ABSTRACT Unclassified	c. THIS PAGE Unclassified			

Magnetization losses in multifilament coated superconductors

G. A. Levin^{a)} and P. N. Barnes

Air Force Research Laboratory, Propulsion Directorate, 1950 Fifth Street, Bldg. 450,
Wright-Patterson Air Force Base, Ohio 45433

N. Amemiya, S. Kasai, K. Yoda, and Z. Jiang

Faculty of Engineering, Yokohama National University, 79-5 Tokiwadai, Hodogaya,
Yokohama 240-8501, Japan

(Received 26 August 2004; accepted 7 December 2004; published online 10 February 2005)

We report the results of a study of the magnetization losses in experimental multifilament, as well as control (uniform) coated superconductors exposed to time-varying magnetic fields of various frequencies. Both the hysteresis loss, proportional to the sweep rate of the applied magnetic field, and the coupling loss, proportional to the square of the sweep rate, have been observed. A scaling is found that allows us to quantify each of these contributions and extrapolate the results of the experiment beyond the envelope of accessible field amplitude and frequency. The combined loss in the multifilament conductor is reduced by about 90% in comparison with the uniform conductor at full field penetration at a sweep rate as high as 3 T/s. © 2005 American Institute of Physics. [DOI: 10.1063/1.1861955]

Coated superconductors are currently produced by depositing a 1–2 μm thin film of $\text{Y}_1\text{Ba}_2\text{Cu}_3\text{O}_{6+x}$ (YBCO) on a 100- μm -thick buffered metal substrate in the form of a thin tape. The superconducting film is subsequently covered by protective silver layer.¹ The width of the developed coated conductors is 1 cm, with plans to reduce it to 4 mm. When such a wide superconducting tape is exposed to a transverse time-varying magnetic field, a large amount of heat is generated.^{2,3}

A significant reduction of magnetization losses in coated conductors is a prerequisite for their use in ac power applications, such as transformers, generators, and motors. It is also important for such a modification to be compatible with current techniques of manufacturing the coated conductors. Carr and Oberly⁴ have proposed that magnetization losses can be reduced if the superconducting layer is divided into many parallel superconducting stripes segregated by nonsuperconducting resistive barriers and the tape is twisted. Cobb *et al.*⁵ have demonstrated the validity of this approach on small samples of YBCO films deposited on LaAlO_3 single-crystal substrate. However, because of the small size of the samples and insulating substrate, coupling losses due to currents induced between the superconducting stripes² could not be detected.

Here we report the results of the magnetization loss measurements in actual multifilamentary YBCO-coated conductors. Two 1×10 cm samples of YBCO-coated conductors were subjected to a magnetic field normal to the wide face of the tape and varying at different frequencies f in the range 11–170 Hz with the magnetic induction amplitude B up to 70 mT. The longer samples and measurements at several frequencies enabled us to study both hysteresis and coupling losses.⁶ We found a scaling that allows to separate and quantify the contributions of the two types of losses. The measured magnetization losses are compared with theoretical estimates and some of the implications of our findings for the

prospects of coated superconductors for power applications are discussed.

The samples were cut from a longer tape of YBCO-coated conductor with Hastelloy substrate provided by SuperPower, Inc.⁷ The multifilamentary sample was made by dividing the uniform YBCO layer into 20 stripes by laser ablation.^{5,8} Grooves less than 50 μm wide separating the superconducting stripes were cut through the silver protective layer, YBCO, and buffer layers, and extended 5–10 μm into the substrate. In the groove area, the aforementioned material was evaporated. The electrical connection between the YBCO layer and the substrate is predominantly provided by Hastelloy that was melted and splashed across the walls of the groove during ablation.⁸

The losses were measured using a linked pick-up coil, as described in Refs. 6 and 9. The entire system was cooled in liquid nitrogen. A sample was placed inside the bore of an ac dipole magnet that generated a magnetic field whose frequency was varied from 11.3 to 171.0 Hz.

In Fig. 1, the losses in the uniform sample at different frequencies are shown. For comparison, we use the analytical result for the hysteresis loss:¹⁰

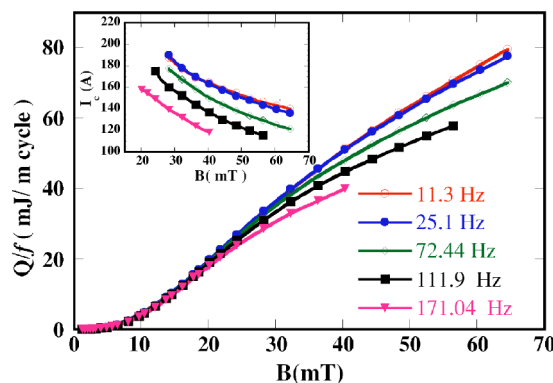


FIG. 1. (Color online) Energy loss in the uniform sample per unit length, per cycle (Q/f) at five different frequencies, from 11.3 to 171 Hz, plotted vs amplitude of the applied magnetic field. The inset shows the bulk average critical current obtained from the loss data by inverting Eq. (1).

^{a)}Electronic mail: george.levin@wpafb.af.mil

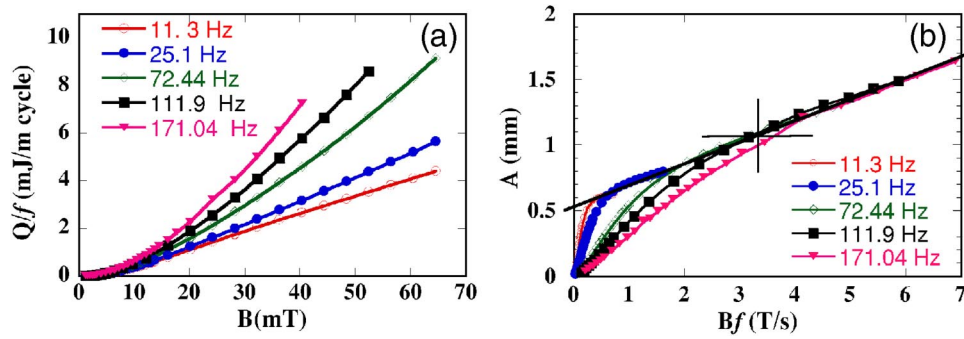


FIG. 2. (Color online) (a) The energy loss per cycle (Q/f) in the 20-filament sample, plotted vs amplitude of the applied magnetic field. (b) The specific loss $\Lambda = Q/I_c Bf$ in mm vs sweep rate. The plot includes all the data from (a). The loss data were normalized by a constant value of measured transport current $I_c = 110$ A. The straight line is an approximate linear fit corresponding to Eq. (5). Crossed lines in the center indicate the break-even point, where the coupling losses are equal to hysteresis loss.

$$Q_h \approx J_c W^2 (B - B_c) f, \quad B \gg B_c. \quad (1)$$

Here Q_h is the hysteresis power loss per unit length, J_c is the critical current per unit width, and W is the width of the sample. $B_c = \mu_0 J_c \ln 4/\pi$ and $\mu_0 = 4\pi \times 10^{-7}$ H/m is the magnetic permeability of vacuum.

Rather surprisingly, the energy loss per cycle *decreases* with increasing frequency in contradiction to an earlier report.¹¹ However, additional measurements on other uniform samples confirm a 15%–20% decrease of the per cycle loss over a decade of frequency in the range shown in Fig. 1. A discussion of the possible explanations of this phenomenon is beyond the scope of this letter and is not crucial for our main results. Inverting Eq. (1) within its range of applicability we obtained the critical current $I_c(B, f) = J_c W$ shown in the inset. The value of I_c obtained from ac losses is the bulk average and is always greater than the transport critical current which is limited by the weakest section of the conductor. Unfortunately, the transport current could not be reproducibly measured in the uniform sample because it was accidentally destroyed during the measurement. The manufacturer provided the self-field value of $I_c = 132$ A for that particular section of the tape.

In a multifilamentary sample, the hysteresis loss is proportional to the width of an individual stripe:^{4,5,12}

$$Q_h^{\text{st}} = I_c W_n (B - B'_c) f. \quad (2)$$

Here W_n is the width of the stripe and I_c is the total critical current. In our sample the distance between the centers of the neighboring grooves is 0.5 mm, while the width of the superconducting stripes $W_n \approx 0.45$ mm.

Figure 2(a) shows the loss per cycle at five frequencies in the multifilament sample. The losses *increase* with frequency, while the field dependence, which is essentially linear at the lowest frequency, acquires a clear curvature at higher frequencies. The loss that has quadratic dependence on the sweep rate Bf is the coupling loss.² The eddy current losses in the silver layer and substrate are negligible because the silver cap layer is striated along with the YBCO layer. The average electric field directed perpendicular to the stripes, $E_\perp \sim BfL$. Here L is the length of the sample or, in a long twisted conductor, half of the twist pitch. The power per unit length dissipated as the result of the current passing through the metal connecting the stripes is⁴

$$Q_n^{\text{st}} \sim \rho^{-1} |E_\perp|^2 d_n W = 2 \frac{(BfL)^2}{\rho} d_n W. \quad (3)$$

Here d_n is the thickness of the normal metal layer (mostly the substrate) and ρ is the effective resistivity. The combined magnetization loss can be defined as follows:

$$Q = Q_h^{\text{st}} + Q_n^{\text{st}} \equiv \Lambda I_c Bf. \quad (4)$$

Here Λ is the power loss per unit length, per unit of the critical current, per unit of the sweep rate. It has the dimensionality of length. Comparison with Eqs. (2) and (3) suggests that in the limit $B \gg B'_c$,

$$\Lambda = \lambda_1 + \lambda_2 Bf, \quad (5)$$

where

$$\lambda_1 \approx W_n, \quad \lambda_2 = 2 \frac{L^2}{\rho I_c} d_n W. \quad (6)$$

Thus, these two parameters are independent of the sweep rate and characterize the conductor itself. One of them determines the hysteresis loss and the other the coupling loss.³ Moreover, Λ can be a more objective criterion of how successful the striation is in reducing the net loss than is the value of the loss itself, since it accounts for the reduction of the critical current by striation.

The scaling defined by Eq. (5) is demonstrated in Fig. 2(b). It shows the same data as in Fig. 2(a), but presented as Λ versus sweep rate. The transport critical current $I_c = 110$ A was measured directly in this sample.⁶ The linear fit shown by the solid line allows us to determine $\lambda_1 = 0.52$ mm and $\lambda_2 = 0.155$ mm s/T. Equation (5) can also be rewritten as

$$\Lambda = \lambda_1 \left(1 + \frac{Bf}{\mathcal{R}} \right), \quad \mathcal{R} = \frac{\lambda_1}{\lambda_2} = \frac{1}{2} \frac{W_n}{W} \frac{\rho I_c}{d_n L^2}. \quad (7)$$

Here \mathcal{R} is the *break-even sweep rate* at which the coupling loss is equal to the hysteresis loss. For our sample, $\mathcal{R} \approx 3.3$ T/s.

Resistivity in the direction perpendicular to the grooves is that of the Hastelloy substrate, $\rho \approx 130 \mu\Omega$ cm. Using Eq. (7) we can estimate the break-even rate \mathcal{R} . Taking $W_n \approx 0.5$ mm, $W = 10$ mm, $L = 10$ cm, the experimental values⁶ of the sheet resistance $\rho/d_n \approx 13$ m Ω , and $I_c = 110$ A, we obtain

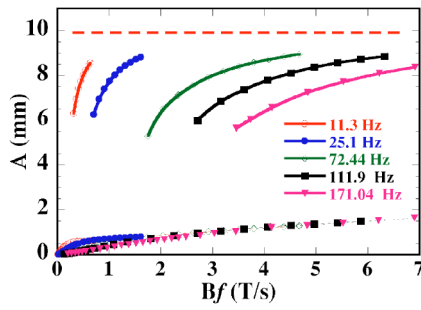


FIG. 3. (Color online) The data for uniform and 20-filament samples are shown together. The plot includes the data from Fig. 1 presented as $\Lambda = Q/I_c Bf$ and from Fig. 2(b). For the uniform sample we have used the values of the critical current shown in the inset to Fig. 1.

$$\mathcal{R} \approx \frac{W_n}{2W} \frac{\rho I_c}{d_n L^2} \approx 3.6 \text{ T/s}. \quad (8)$$

This is not a bad agreement with the experimental value (3.3 T/s), considering that Eq. (7) is practically an order-of-magnitude estimate.

In Fig. 3, the losses for striated and uniform samples are presented together. The data for the uniform sample are normalized to the field and frequency dependent critical current, shown in the inset to Fig. 1. Given the small coupling losses in the uniform sample, $\Lambda \approx W(1 - B_c/B)$ with $B_c \sim 10$ mT. Note that this is a conservative comparison because the losses in the uniform sample were normalized by the bulk average critical current, which is always greater than the transport critical current we have used to normalize losses in the multifilament sample.

An objective criterion of the effectiveness of striation in reducing losses at full field penetration is the ratio Λ/W . As Figs. 2(b) and 3 demonstrate, it extrapolates to approximately 5% in the limit of low sweep rate and increases to 10% at the break-even rate. Since the coefficients \mathcal{R} and λ_1 are known, we can extrapolate the value of loss outside the tested range of parameters. The striation will lose its effectiveness, in comparison with the uniform sample, at the sweep rate about 60 T/s when the extrapolated $\Lambda(Bf) = 10$ mm.

Let us consider the implications of these results for the prospects of coated superconductors in ac power applications. The specifications for future conductors will likely be defined by three criteria: the level of acceptable power loss per unit length (Q_{goal}) at an operating sweep rate $(B_{\perp}f)_0$, and the critical current I_c (B_{\perp} is the normal to the face of the tape component of the magnetic induction). According to Eq. (4), these parameters determine the value of

$$\Lambda = \frac{Q_{\text{goal}}}{I_c (B_{\perp}f)_0}. \quad (9)$$

In the optimally designed conductor, under most circumstances, the hysteresis loss should be approximately equal to the coupling loss at the operating rate, which means

$$\mathcal{R} \approx (B_{\perp}f)_0. \quad (10)$$

Conditions (9) and (10) determine the required intrinsic parameters λ_1 and λ_2 :

$$\lambda_1 \approx \frac{\Lambda}{2}, \quad \lambda_2 \approx \frac{\lambda_1}{(B_{\perp}f)_0}. \quad (11)$$

As an example, consider a fairly ambitious goal of achieving the level of loss per meter length per amp of critical current $Q_{\text{goal}}/I_c = 1$ mW/Am at an operating sweep rate $(B_{\perp}f)_0 = 10$ T/s. These conditions demand $\Lambda = 0.1$ mm and, correspondingly, the hysteresis length $\lambda_1 \approx 50$ μm . In comparison to the sample used here, this is a tenfold increase in the number density of stripes—from 20 to 200 stripes/cm. The coupling constant λ_2 has to be reduced to 5×10^{-3} mm s/T, which is about 30 times smaller than the experimental value.

If we take Eq. (6) at face value, the main parameter that can be substantially changed is the average resistivity of the normal metal. To increase the effective resistivity by more than an order of magnitude over that of Hastelloy will probably require a nonmetallic, insulating medium between the stripes and an unbroken insulating buffer between YBCO and metal substrate. The protective layer (Ag or Cu) has to be striated as well, as done in our sample.

In summary, we have tested a multifilament design of YBCO-coated conductor that at sweep rate ~ 3 T/s allows reduction of magnetization loss by an order of magnitude in comparison with the uniform sample at full field penetration. The analysis presented here shows that even though most ac magnets available for such experiments can achieve the sweep rate of only a few T/s, the scaling shown in Fig. 2(b) can determine the intrinsic characteristics of a tested conductor (λ_1 and \mathcal{R}) and can predict what the losses will be well outside the envelope of accessible values of the field amplitude B and frequency f . This type of tests can guide the development of conductor designs needed to help reduce the magnetization losses by another one or two orders of magnitude in order to allow the implementation of coated superconductors in demanding ac power applications.

This work was supported by the Air Force Office of Scientific Research under Contract No. AOARD-03-4031. One of the authors (G. A. L.) was supported by a National Research Council Senior Research Associateship Award at the Air Force Research Laboratory.

¹D. Larbalestier, A. Gurevich, D. M. Feldman, and A. Polyanskii, *Nature* (London) **414**, 368 (2001).

²W. J. Carr Jr., *AC Loss and Macroscopic Theory of Superconductors* (Taylor and Francis, New York, 2001).

³M. Tinkham, *Introduction to Superconductivity*, 2nd edition (McGraw-Hill, New York, 1996).

⁴W. J. Carr Jr. and C. E. Oberly, *IEEE Trans. Appl. Supercond.* **9**, 1475 (1999).

⁵C. B. Cobb, P. N. Barnes, T. J. Haugan, J. Tolliver, E. Lee, M. Sumption, E. Collings, and C. E. Oberly, *Physica C* **382**, 52 (2002).

⁶N. Amemiya, S. Kasai, K. Yoda, Z. Jiang, G. A. Levin, P. N. Barnes, and C. E. Oberly *Supercond. Sci. Technol.* **17**, 1464 (2004).

⁷V. Selvamanickam, H. G. Lee, Y. Li, X. Xiong, Y. Qiao, J. Reeves, Y. Xie, A. Knoll, and K. Lenseth, *Physica C* **392–396**, 859 (2003).

⁸K. E. Hix, M. C. Rendina, J. L. Blackshire, and G. A. Levin, *cond-mat/0406311*.

⁹Z. Jiang and N. Amemiya, *Supercond. Sci. Technol.* **17**, 371 (2004).

¹⁰E. H. Brandt and M. Indenbom, *Phys. Rev. B* **48**, 12893 (1993).

¹¹S. P. Ashworth, M. Maley, M. Suenaga, S. R. Foltyn, and J. O. Willis, *J. Appl. Phys.* **88**, 2718 (2000).

¹²Y. Mawatari, *Phys. Rev. B* **54**, 13215 (1996).